


## PIN ASSIGNMENTS


P1	P2	P1	P2
1 WHITE	15 ORANGE	15 ORANGE	15
2 RED	16 BLACK	16 BLACK	16
3 DRAIN	17 WHITE	17 WHITE	17
6 RED	18 BROWN	18 BROWN	18
7 GREEN	19 DRAIN	19 DRAIN	19
9 WHITE	23 WHITE	23 WHITE	23
10 GREEN	24 BLUE	24 BLUE	24
11 DRAIN	22 DRAIN	22 DRAIN	22
14 YELLOW	SHELL BRAID+DRAIN	SHELL	SHELL

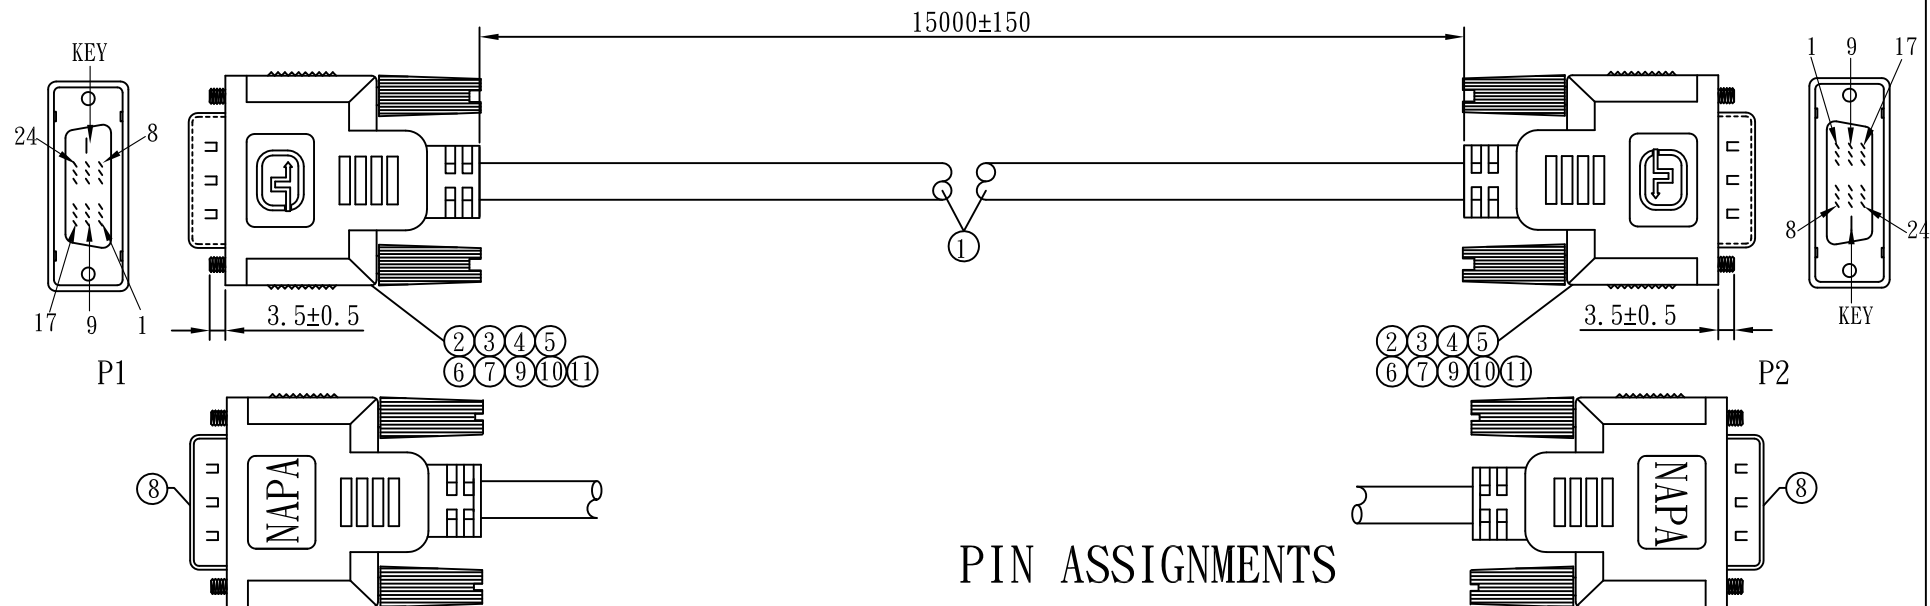
### NOTES:

1. 100% OPEN, SHORT & MISWIRE TEST.
2. PAY ATTENTION TO PIN ASSIGNMENTS.

TOLERANCES			REVISIONS				COMPONENT NO : DVIP/DVIP-S10	Arvanics Corporation.				
X .	+	mm	REV	DESCRIPTION	DATE	APPVD.	APPROVED :					
X . X	+	mm	0	SAMPLE					TITLE : CABLE ASS' Y			
X . XX	+	mm							REQUIRED DOCUMENTS : *			
X . XXX	+	mm					CHECKED :		SCALE : /		SHELLT :1/2	REV:0
	-	mm					DRAWN :熊 景		DRAWING : BJ7329		THIRD ANGLE PROJECTION	
	-	mm					DATE : JUN-24-15		FILE : F:\SAMPLE\BJ7329A.DWG			
METRIC (mm)												

NO	DESCRIPTION	MATERIAL
1	CABLE	UL20276 (24#*1P+EAM)*4+24 # *5C+AEB85% OD:9.5mm CLR-243 BEIGE
2	CONN	DVI(18+1) MALE PBT BLACK PIN G/F
3	CASE SHIELD	DVI SHIELD ID:11.0mm PLATED NICKEL
4	SHELL	DVI(18+1) MALE SHELL TIN PLATED
5	PVC	SHORE A 95±2 COLOR:BEIGE
6	TUBE	UL/CSA 125°C VW-1 (F4) 300V Φ1.0mm BLACK
7	TUBE	UL/CSA 125°C VW-1 (F4) 300V Φ3.0mm BLACK
8	DUST COVER	CLEAR
9	OUTERMOLDED	DVI ID:10.0mm SHORE 95+5/-2 CLR-023
10	SCREW	DVI SCREW 2.8*31.5mm#4-40 MOLDED ABS COLOR:BEIGE
11	COPPER-FOIL	W8*T0.04mm

TOLERANCES			REVISIONS				COMPONENT NO : DVIP/DVIP-S10		Arvanics Corporation.			
X . + mm - mm X . X + mm - mm X . XX + mm - mm X . XXX + mm - mm  METRIC (mm)	REV	DESCRIPTION	DATE	APPVD.	DVIP/DVIP-S10							
	0	SAMPLE			APPROVED :							
					CHECKED :							
					DRAWN :熊 景							
					DATE :JUN-24-15							
	TITLE : CABLE ASS'Y		REQUIRED DOCUMENTS : *		SCALE : /		SHELLT:2/2		REV:0			
	DRAWING : BR7329		THIRD ANGLE PROJECTION									
	FILE : F:\SAMPLE\BJ7329A.DWG											



## PIN ASSIGNMENTS


P1		P2	P1		P2
1	WHITE	1	15	ORANGE	15
2	RED	2	16	BLACK	16
3	DRAIN	3	17	WHITE	17
6	RED	6	18	BROWN	18
7	GREEN	7	19	DRAIN	19
9	WHITE	9	23	WHITE	23
10	GREEN	10	24	BLUE	24
11	DRAIN	11	22	DRAIN	22
14	YELLOW	14	SHELL	BRAID+DRAIN	SHELL

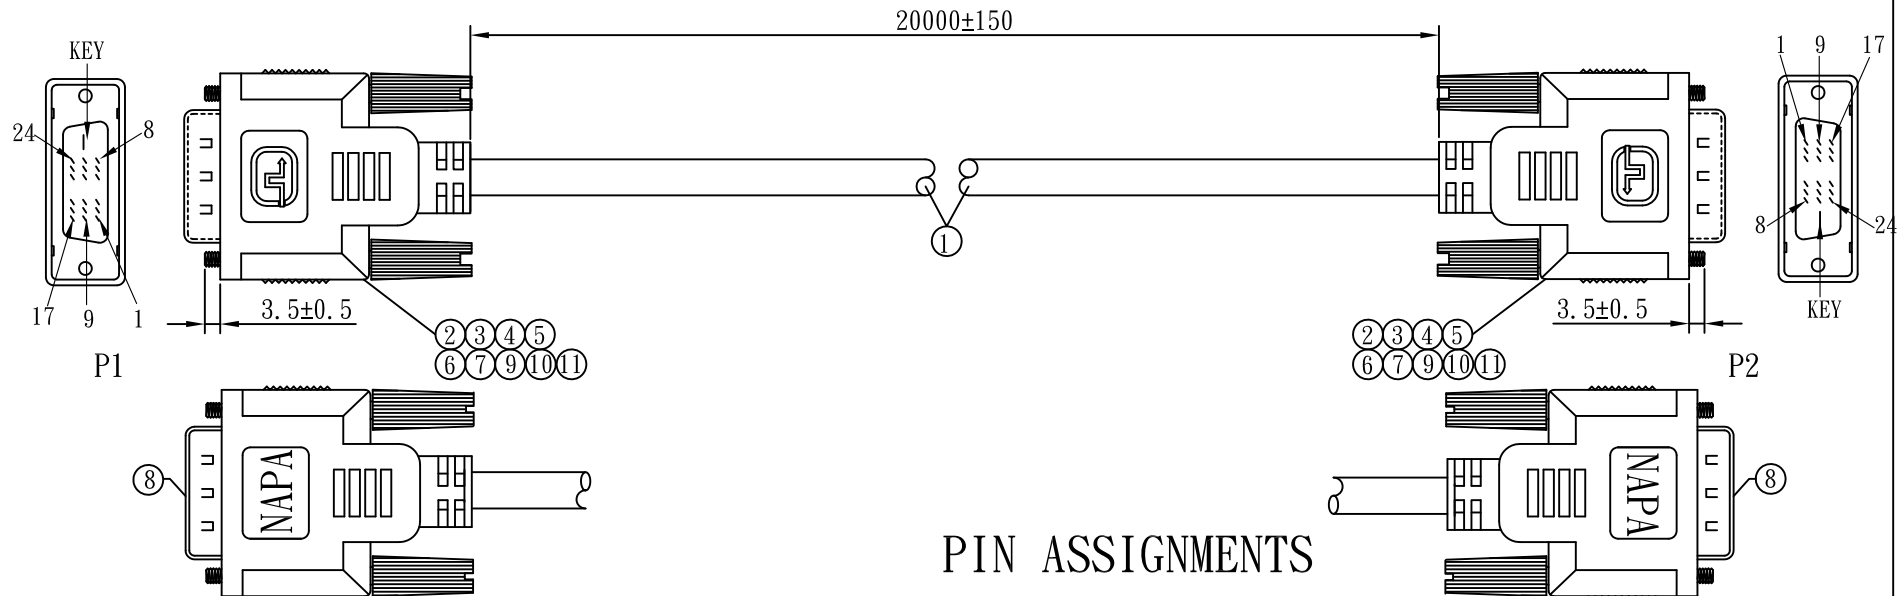
## NOTES:

1. 100% OPEN, SHORT & MISWIRE TEST.
2. PAY ATTENTION TO PIN ASSIGNMENTS.

TOLERANCES			REVISIONS			COMPONENT NO : DVIP/DVIP-S15		Arvanics Corporation.		
X .	+	mm	REV	DESCRIPTION	DATE	APPVD.	APPROVED :			
X . X	-	mm	0	SAMPLE				TITLE : CABLE ASS'Y		
X . XX	+	mm					CHECKED :	REQUIRED DOCUMENTS : *		
X . XXX	-	mm						SCALE : /		SHELLT : 1/2
	+	mm					DRAWN : 熊 景	DRAWING : BJ7329		REV:0
	-	mm					DATE : JUN-24-15	FILE : F:\SAMPLE\BJ7329A.DWG		THIRD ANGLE PROJECTION

NO	DESCRIPTION	MATERIAL
1	CABLE	UL20276 (24#*1P+EAM)*4+24#*5C+AEB85% OD:9.5mm CLR-243 BEIGE
2	CONN	DVI(18+1) MALE PBT BLACK PIN G/F
3	CASE SHIELD	DVI SHIELD ID:11.0mm PLATED NICKEL
4	SHELL	DVI(18+1) MALE SHELL TIN PLATED
5	PVC	SHORE A 95±2 COLOR:BEIGE
6	TUBE	UL/CSA 125°C VW-1 (F4) 300V Φ1.0mm BLACK
7	TUBE	UL/CSA 125°C VW-1 (F4) 300V Φ3.0mm BLACK
8	DUST COVER	CLEAR
9	OUTERMOLDED	DVI ID:10.0mm SHORE 95+5/-2 CLR-023
10	SCREW	DVI SCREW 2.8*31.5mm#4-40 MOLDED ABS COLOR:BEIGE
11	COPPER-FOIL	W8*T0.04mm

TOLERANCES			REVISIONS				COMPONENT NO :	Arvanics Corporation.			
X . + mm - mm X . X + mm - mm X . XX + mm - mm X . XXX + mm - mm  METRIC (mm)	REV	DESCRIPTION		DATE	APPVD.	DVIP/DVIP-S15					
	0	SAMPLE				APPROVED :					
						CHECKED :					
						SCALE : /		SHELLT:2/2		REV:0	
						DRAWN :熊 景		DRAWING : BR7329		THIRD ANGLE PROJECTION 	
						DATE :JUN-24-15		FILE : F:\SAMPLE\BJ7329A.DWG			




## PIN ASSIGNMENTS


P1		P2	P1		P2
1	WHITE	1	15	ORANGE	15
2	RED	2	16	BLACK	16
3	DRAIN	3	17	WHITE	17
6	RED	6	18	BROWN	18
7	GREEN	7	19	DRAIN	19
9	WHITE	9	23	WHITE	23
10	GREEN	10	24	BLUE	24
11	DRAIN	11	22	DRAIN	22
14	YELLOW	14	SHELL	BRAID+DRAIN	SHELL

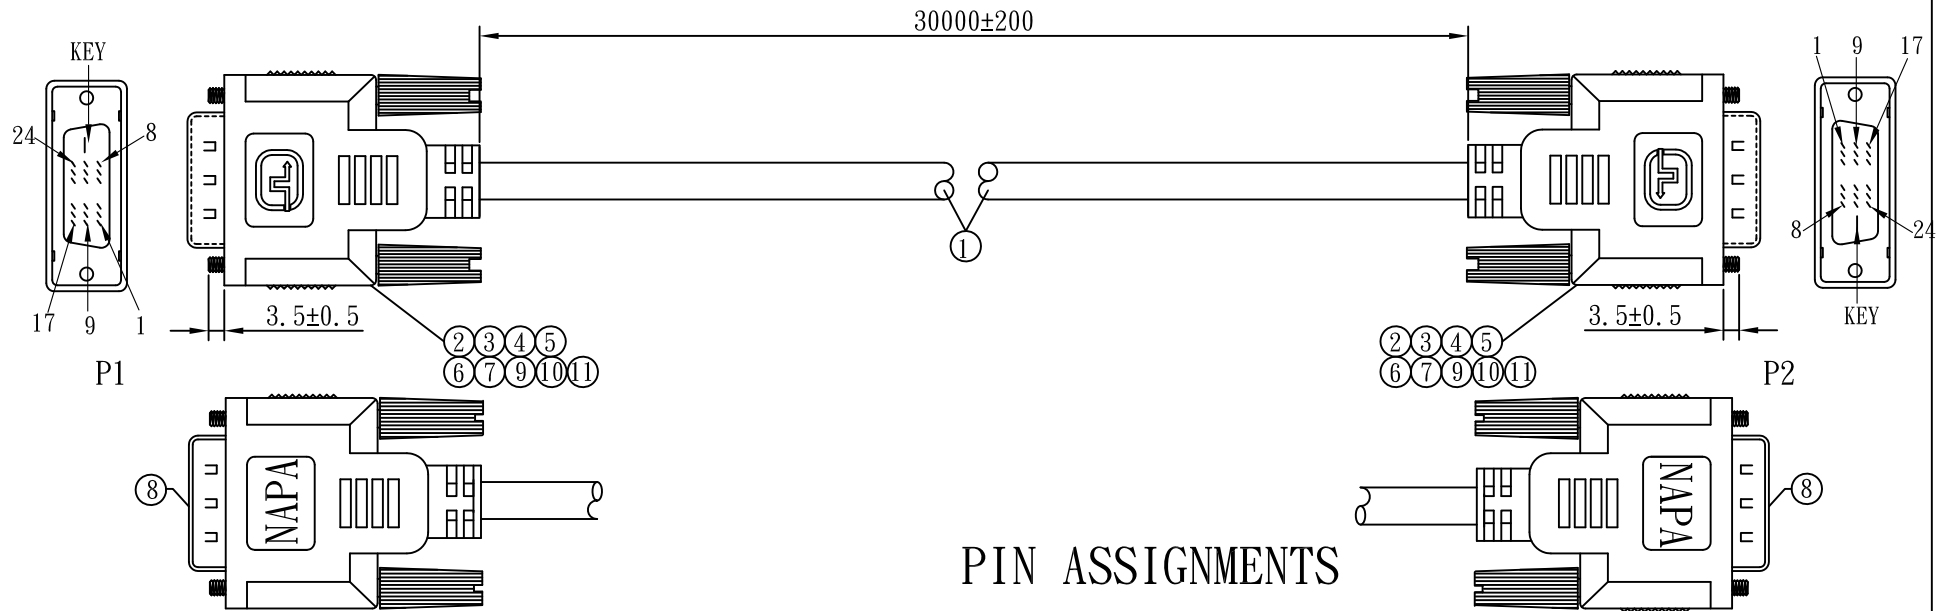
### NOTES:

1. 100%OPEN, SHORT & MISWIRE TEST.
2. PAY ATTENTION TO PIN ASSIGNMENTS.

TOLERANCES			REVISIONS				COMPONENT NO : DVIP/DVIP-S20		Arvanics Corporation.		
X . + mm X . X + mm X . XX + mm X . XXX + mm  METRIC (mm)	REV	DESCRIPTION	DATE	APPVD.	APPROVED :		TITLE : CABLE ASS' Y				
	0	SAMPLE					REQUIRED DOCUMENTS : *				
					CHECKED :		SCALE : /		SHELLT : 1/2	REV:0	
					DRAWN :熊 景		DRAWING : BJ7329		THIRD ANGLE PROJECTION		
					DATE : JUN-24-15		FILE : F:\SAMPLE\BJ7329A.DWG				

NO	DESCRIPTION	MATERIAL
1	CABLE	UL20276 (24#*1P+EAM)*4+24 # *5C+AE85% OD:9.5mm CLR-243 BEIGE
2	CONN	DVI(18+1) MALE PBT BLACK PIN G/F
3	CASE SHIELD	DVI SHIELD ID:11.0mm PLATED NICKEL
4	SHELL	DVI(18+1) MALE SHELL TIN PLATED
5	PVC	SHORE A 95±2 COLOR:BEIGE
6	TUBE	UL/CSA 125°C VW-1 (F4) 300V Φ1.0mm BLACK
7	TUBE	UL/CSA 125°C VW-1 (F4) 300V Φ3.0mm BLACK
8	DUST COVER	CLEAR
9	OUTERMOLDED	DVI ID:10.0mm SHORE 95+5/-2 CLR-023
10	SCREW	DVI SCREW 2.8*31.5mm#4-40 MOLDED ABS COLOR:BEIGE
11	COPPER-FOIL	W8*T0.04mm

TOLERANCES			REVISIONS				COMPONENT NO :	Arvanics Corporation.			
			REV	DESCRIPTION	DATE	APPVD.	DVIP/DVIP-S20				
X .	+	mm	0	SAMPLE			APPROVED :	TITLE : CABLE ASS' Y			
X .X	+	mm									
	-	mm					CHECKED :	REQUIRED DOCUMENTS : *			
X .XX	+	mm						SCALE : / SHELLT:2/2 REV:0			
	-	mm					DRAWN :熊 景	DRAWING : BR7329		THIRD ANGLE PROJECTION 	
X .XXX	+	mm						FILE : F:\SAMPLE\BJ7329A. DWG			
	-	mm					DATE :JUN-24-15				
METRIC (mm)											




## PIN ASSIGNMENTS


P1	P2	P1	P2
1 WHITE	15 ORANGE	15 ORANGE	15
2 RED	16 BLACK	16 BLACK	16
3 DRAIN	17 WHITE	17 WHITE	17
6 RED	18 BROWN	18 BROWN	18
7 GREEN	19 DRAIN	19 DRAIN	19
9 WHITE	23 WHITE	23 WHITE	23
10 GREEN	24 BLUE	24 BLUE	24
11 DRAIN	22 DRAIN	22 DRAIN	22
14 YELLOW	14 SHELL	22 BRAID+DRAIN	22
		SHELL	SHELL

### NOTES:

1. 100% OPEN, SHORT & MISWIRE TEST.
2. PAY ATTENTION TO PIN ASSIGNMENTS.

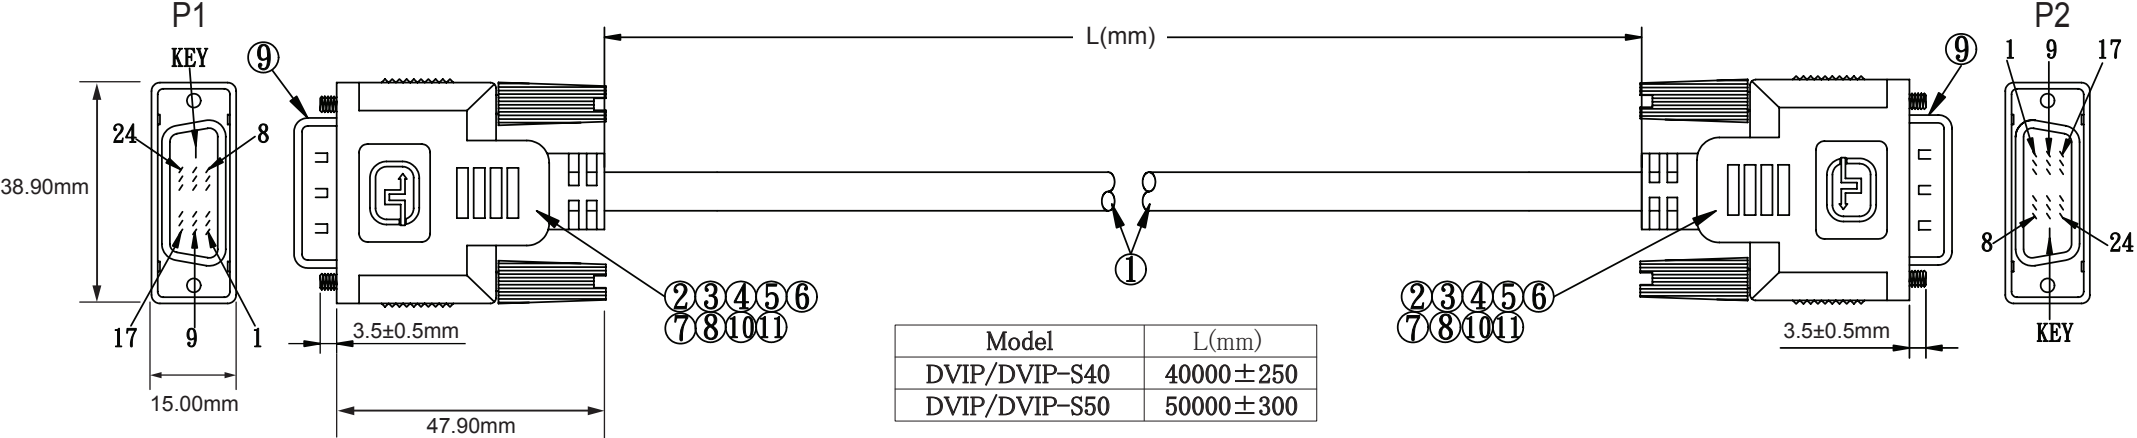
TOLERANCES			REVISIONS				COMPONENT NO : DVIP/DVIP-S30		Arvanics Corporation.			
X .	+	mm	REV	DESCRIPTION	DATE	APPVD.	APPROVED :					
X .	+	mm	0	SAMPLE			APPROVED :		TITLE : CABLE ASS' Y			
X . X	+	mm					CHECKED :		REQUIRED DOCUMENTS : *			
X . XX	+	mm					DRAWN :熊 景		SCALE : /		SHELLT :1/2	REV:0
X . XXX	+	mm					DATE : JUN-24-15		DRAWING : BJ7329		THIRD ANGLE PROJECTION	
	-	mm					FILE : F:\SAMPLE\BJ7329A.DWG					
METRIC (mm)												

NO	DESCRIPTION	MATERIAL
1	CABLE	UL20276 (24#*1P+EAM)*4+24 #*5C+AEB85% OD:9.5mm CLR-243 BEIGE
2	CONN	DVI(18+1) MALE PBT BLACK PIN G/F
3	CASE SHIELD	DVI SHIELD ID:11.0mm PLATED NICKEL
4	SHELL	DVI(18+1) MALE SHELL TIN PLATED
5	PVC	SHORE A 95±2 COLOR:BEIGE
6	TUBE	UL/CSA 125°C VW-1 (F4) 300V Φ1.0mm BLACK
7	TUBE	UL/CSA 125°C VW-1 (F4) 300V Φ3.0mm BLACK
8	DUST COVER	CLEAR
9	OUTERMOLDED	DVI ID:10.0mm SHORE 95+5/-2 CLR-023
10	SCREW	DVI SCREW 2.8*31.5mm#4-40 MOLDED ABS COLOR:BEIGE
11	COPPER-FOIL	W8*T0.04mm

TOLERANCES			REVISIONS				COMPONENT NO : DVIP/DVIP-S30		Arvanics Corporation.		
X . + mm - mm X .X + mm - mm X .XX + mm - mm X .XXX + mm - mm  METRIC (mm)	REV	DESCRIPTION	DATE	APPVD.	APPROVED :		TITLE : CABLE ASS' Y				
	0	SAMPLE					REQUIRED DOCUMENTS : *				
					CHECKED :		SCALE : /		SHELLT:2/2	REV:0	
					DRAWN :熊 景		DRAWING : BR7329		THIRD ANGLE PROJECTION		
					DATE :JUN-24-15		FILE : F:\SAMPLE\BJ7329A.DWG				



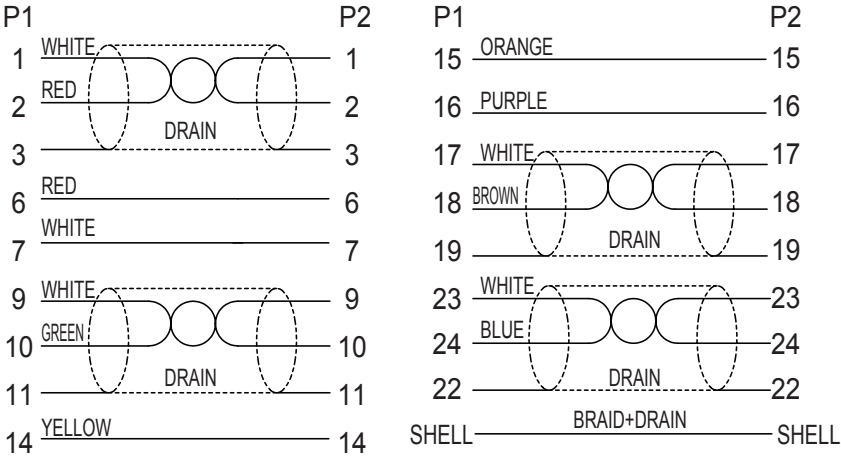
Model : DVIP/DVIP-Sxx




- NOTES :
- 1. 100% OPEN, SHORT & MISWIRE TEST.
  - 2. PAY ATTENTION TO PIN ASSIGNMENTS.

NO	DESCRIPTION	MATERIAL	QTY
1	CABLE	UL 20276(24#*1P+EAM)*4+24#*5C+AEB85% OD:9.5mm CLR-243 BEIGE	1
2	CONNECTOR	DVI(18+1) MALE PBT BLACK PIN G/F	2
3	CASE SHIELD	DVI SHIELD ID=10.5mm PLATED NICKEL	2
4	CASE SHIELD	DVI SHIELD ID:10.5mm NO PLATED	2
5	SHELL	DVI(18+1) MALE SHELL GOLD PLATED	2
6	PVC	SHORE A 95±2 COLOR:BEIGE	2
7	TUBE	UL/CSA 125°C VW-1(F4) 300V ϕ 1.0mm BLACK	2
8	TUBE	UL/CSA 125°C VW-1(F4) 300V ϕ 2.5mm BLACK	2
9	DUST COVER	CLEAR	2
10	OUTERMOLDED	DVI ID:10mm SHORE95± CLR-023	2
11	SCREW	DVI SCREW 2.8*31.5mm #4-40 MOLDED ABS COLOR:BEIGE	2

PIN ASSIGNMENTS



COMPONENT NO : DVI-DVI 40M	Arvanics Corporation		
APPROVED :	Model : DVIP/DVIP-S40, S50		
	TITLE : CABLE ASS'Y		
CHECKED :	REQUIRED DOCUMENTS : *		
	SCALE : /	SHEET : 1/2	REV : 0
DRAWN : 熊 景	DRAWING : BJ7329		THIRD ANGLE PROJECTION 
DATE : Sep-14-09	FILE : F : \SAMPLE\BJ7329A.DWG		