



Model: DVIP/DVIP-DxxBK

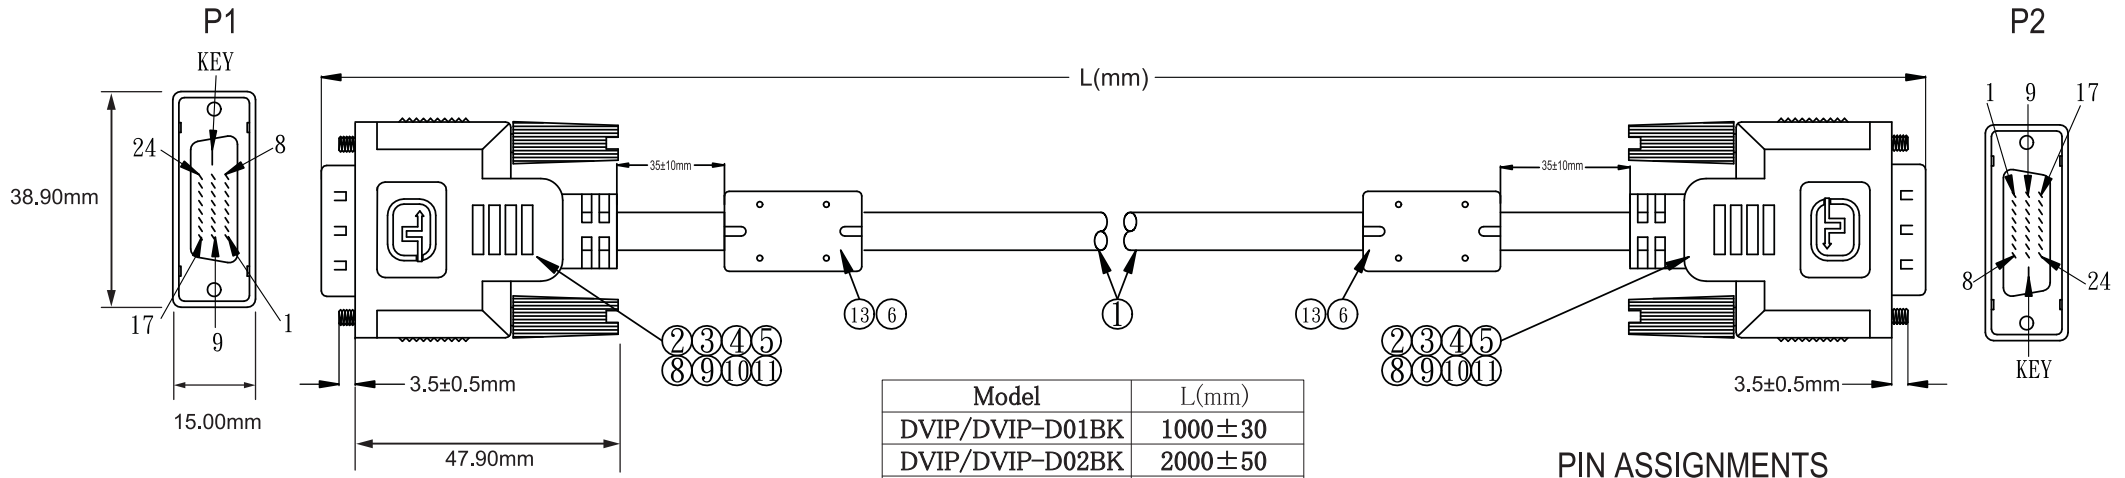

Model	L(mm)
DVIP/DVIP-D01BK	1000±30
DVIP/DVIP-D02BK	2000±50
DVIP/DVIP-D03BK	3000±100
DVIP/DVIP-D05BK	5000±100

PIN ASSIGNMENTS

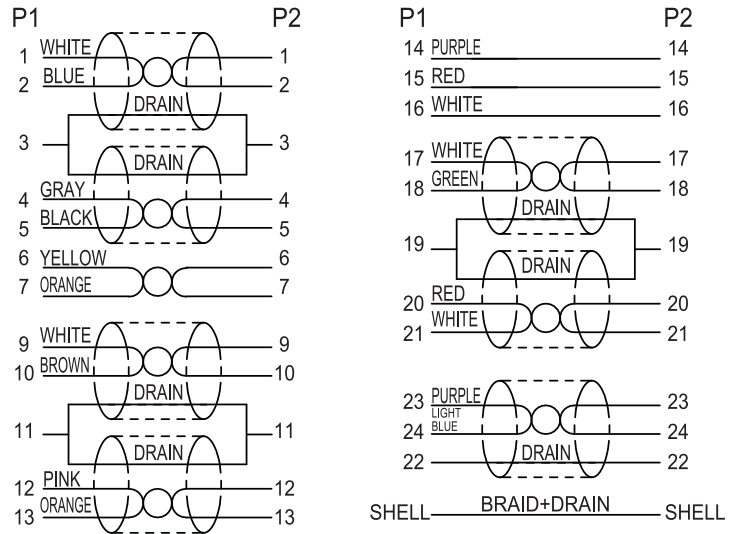

- NOTES :
- 100% OPEN, SHORT & MISWIRE TEST.
 - PAY ATTENTION TO PIN ASSIGNMENTS.

NO	DESCRIPTION	MATERIAL	QTY
1	CABLE	UL/CSA 20276(30WG* 1P+EAM)*7+30AWG*1P+30AWG*3C +AEB(AL) 85% OD:7.0mm CLR-006 BLACK ABS 500g 60 48H	1
2	CONNECTOR	DVI(24+1) MALE PBT BLACK PIN G/F	2
3	SHELL	DVI SHELL PLATED TIN	2
4	CASE SHELL	DVI ID:8.5mm	2
5	CASE SHELL	DVI ID:8.5mm	2
6	PVC	SHORE A 88±2 COLOR : BLACK CLR-006	2
8	TUBE	UL/CSA 125°C VW-1(F4) 300V ϕ 2.5mm BLACK	2
9	DUST COVER	PE CLEAR	2
10	OUTERMOLDED	DVI ID:8.0mm SHORE A 93-95 CLR-006 BLACK+2PCS SW BLACK	2
11	SCREW	DVI SCREW 2.8*31.5mm #4-40 MOLDED ABS COLOR : BLACK CLR-006	2
13	CORE	B29 RH 14.2*28.5*8.0mm	2

COMPONENT NO : DVI CABLE U70204	DVS Corporation		
APPROVED :	Model : DVIP/DVIP-DxxBK		
CHECKED :	TITLE : CABLE ASS'Y		
	REQUIRED DOCUMENTS : *		
	SCALE : 1 : 1	SHEET : 1/1	REV : 1
DRAWN : 熊景	DRAWING : BJ5711		THIRD ANGLE PROJECTION
DATE : Oct-17-09	FILE : F : \SAMPLE\BJ5711A.DWG		